
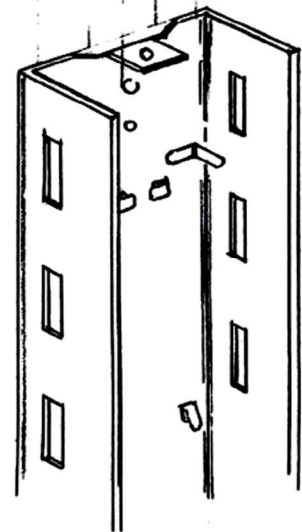



Handy Store Fixtures Heavy-Duty Extender Assembly Instructions

Assembly Instructions:

1. Remove the existing Top Cap.
 2. Remove existing Perforated Board.
 3. Add the Perforated Board from the Extender Kit and apply the Divider Bar.
 4. Align the slots of the Upright with the slots of the existing Uprights, slide the key into and thru the slot.
- Please Note:** A hammer may be required to lock in the Key. The Key should not be able to be removed by hand.
5. Reattach the existing Top Cap with two Top Cap screws.

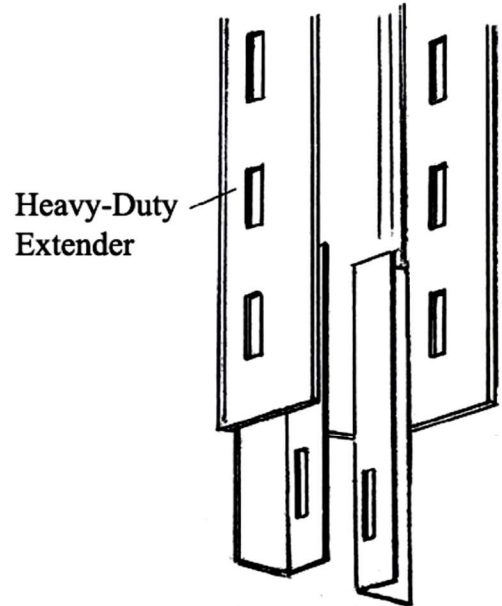

Handy[®]
STORE FIXTURES

MANUFACTURING STORE FIXTURES SINCE 1952

Handy Product Support: (908) 474-1343; Hours of Operation Mon - Fri 8:00 a.m. to 5:00 p.m.
www.handystorefixtures.com